


### **Cutting speed**



### Accessories

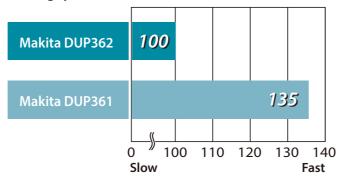

# Shear blade (U) Shear blade (L)

\*Hex socket button head screw M3x6 & Shoulder bolt M8 are also necessary.

Part No. Type	Shear blade (U)	Shear blade (L)
Standard	197588-0	197367-6
For hard branch	199168-8	199169-6
For thin branch	199314-3*	199315-1*

#### Branch catcher set





Shear blade

# **Battery Powered Pruning Shears DUP362**

Capacity	Max cutting : 33 mm (1-5/16")
	Max blade opening: 54 mm
Cutting Torque	250 N
Sound Pressure Level	70 dB(A) or less
Vibration Level	2.5 m/s <sup>2</sup> or less
Dimensions (L x W x H)	305x43x106 mm
	(12"x1-11/16"x4-3/16")
Not weight (Pruning shears only)	077-082 kg (17-18 lbs)

Oil supply (country-specific), Wrench set, Diamond File, Cord Holder, Holster, Harness, Arm Band, Tool Bag, Battery, Charger, Shear Blade

The weight may differ depending on the attachment(s), including the battery cartridge. st and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. ems of standard equipment and specifications may vary by country or area

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201905

# Battery Powered Pruning Shears DUP362 **Powerful performance for** cutting harder branches



Satisfy Professional's Needs



# Harder branches can be cut thanks to approximately 35 % increased torque.

Opening/closing speed of the blades reduces by about 35 %.



# Comfortable backpack harness

- Compact and maneuverable for use in tight spaces
- Fits your body well even when you change posture
- The cord to the shear body can be routed through either
- left or right side.

## Switch box

- Switch box is on the waist belt or shoulder belt with the clip on the back, making it easy to:
- turn on/off Main switch.

**Controller box** 

in the backpack.

 check for error indication (overload, overheating, battery capacity warning, etc.) shown by two LEDs on Switch box.

Two batteries and Controller can be stored



# New Shear blades

- Convex-edged type shear blades for hard branches
- Easy to recover from blade jam

Ergonomically designed handle with soft grip

Smooth cutting similar to that of a hand pruner

Blade can be interlocked with the trigger, providing smooth blade movement similar to that of a hand pruner.



# **Blade opening adjustment**

- Blade opening is adjustable in 2 stages according to the size of branches.
- When you cut slender branches, half-open cutting can increase work efficiency and runtime performance.





Thakita

Cutting torque about 35% Comparison with current model (DUP361) Cutting performance about 71,000 cuts (with two BL1850B)

Half-open

Full-open

use even in tight spaces • With a finger guard



· Highly maneuverable for





For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.

